

N 50, Telescopic cooker hood, 90 cm, Silver metallic  
D49ED22N1B



COOKING PASSION SINCE 1877



A



Telescopic hood: designed to provide powerful extraction without impacting on your kitchen space or design. These hoods pull out from underneath a cabinet when required for a streamlined kitchen.

- ✓ EfficientDrive: save energy and enjoy a quieter kitchen thanks to efficient brushless motor technology
- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense
- ✓ LED lighting: a clear illumination whilst cooking thanks to the energy-saving LED lights
- ✓ Automatic After-running – ventilation continues for several minutes after you turn it off

#### Features

##### Technical Data

Typology : Pull-out  
Approval certificates : CE, VDE  
Length of electrical supply cord (cm) : 175  
Required niche size for installation (HxWxD) : 162mm x 526.0mm x 290mm  
Minimum distance above an electric hob : 430  
Minimum distance above a gas hob : 650  
Net weight (kg) : 10.316  
Type of control : Electronic  
Maximum output air extraction (m<sup>3</sup>/h) : 266  
Boost position output recirculating (m<sup>3</sup>/h) : 178.0  
Maximum output recirculating air (m<sup>3</sup>/h) : 166  
Boost position air extraction (m<sup>3</sup>/h) : 412  
Number of lights (Stck) : 3  
Noise level (dB(A) re 1 pW) : 63  
Diameter of air outlet (mm) : 120 / 150  
Grease filter material : Washable aluminium  
EAN code : 4242004251163  
Connection rating (W) : 76  
Current (A) : 10  
Voltage (V) : 220-240  
Frequency (Hz) : 50; 60  
Plug type : GB plug  
Installation type : Built-in

#### Optional accessories

Z54TC01X0 Standard odor filter (replacement)  
Z54TS01X0 Standard recirculation kit



4 242004 251163

N 50, Telescopic cooker hood, 90 cm, Silver  
metallic  
D49ED22N1B

## Features

### Features

- Electronic controls via Soft touch control
- 3 speeds plus intensive
- 3 x 1,5W LED
- Efficient BLDC technology
- Automatic intensive revert (6mins)
- Automatic after running (Automatic after running (10 minutes))
- 3 metal grease filter cassettes

### Design

- 90 cm wide
- Silver metallic grey
- Handle strip specification: stainless steel with logo
- Filter cover stainless steel, perforated and dishwasher safe

### Performance

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit (accessory) needed
- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591  $\varnothing$  15 cm:  
max. Normal use 266 m<sup>3</sup>/h  
Intensive 412 m<sup>3</sup>/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max.  
normal use exhaust air: 63 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust  
air:  
Max. normal use: 63 dB(A) re 1 pW  
Intensive: 70 dB(A) re 1 pW
- Colour Temperature: 3500 K
- Light Intensity: 355 lux
- Average Energy Consumption: 22.2 kWh/year\*
- Power rating: 76 W
- Blower Efficiency Class: B\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: C\*




### Planning and installation information

- Dimensions (HxWxD): 203 x 898 x 290 mm
- Built-in dimensions (HxWxD): 162 x 526 x 290 mm
- Diameter pipe  $\varnothing$  150 mm ( $\varnothing$  120 mm enclosed)
- Electrical cable length 1.75 m


\* In accordance with the EU-Regulation No 65/2014

N 50, Telescopic cooker hood, 90 cm, Silver metallic  
D49ED22N1B



## Dimensioned drawings

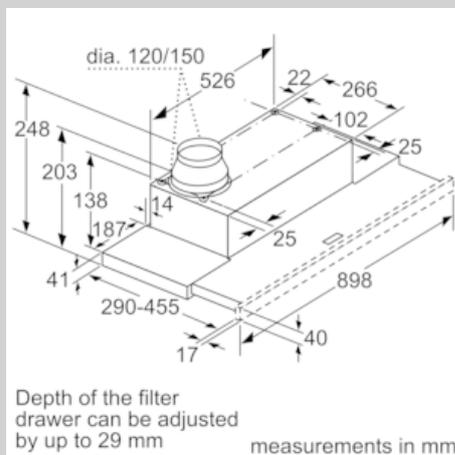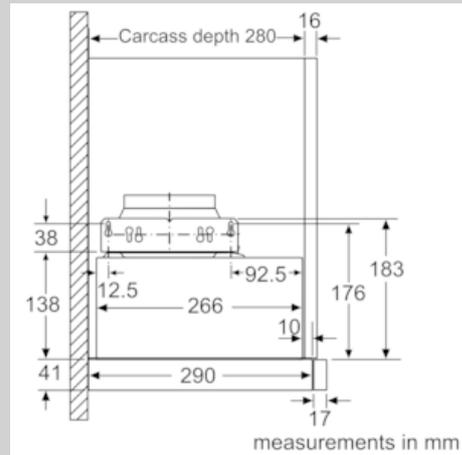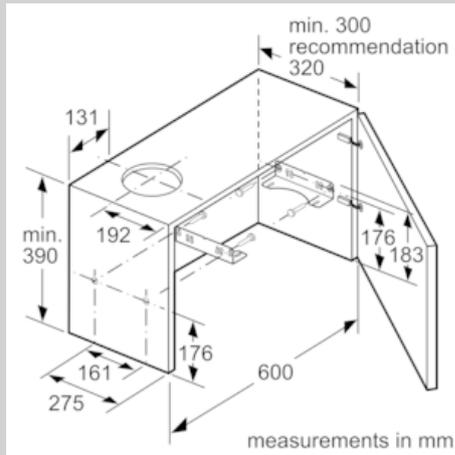

Depth of the filter drawer can be adjusted by up to 29 mm

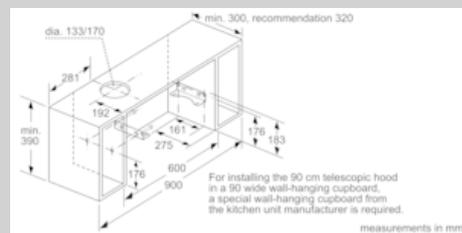

For installing the 90 cm telescopic hood in a 90 wide wall-hanging cupboard, a special wall-hanging cupboard from the kitchen unit manufacturer is required.

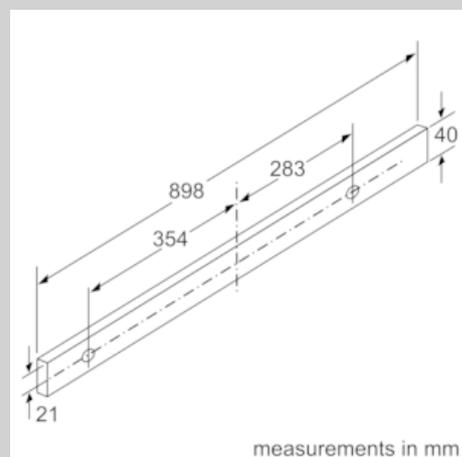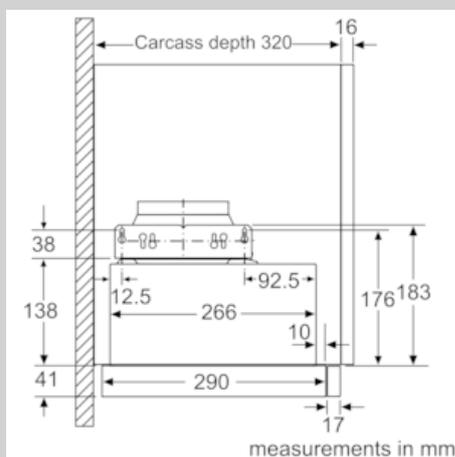

N 50, Telescopic cooker hood, 90 cm, Silver  
 metallic  
 D49ED22N1B

## Dimensioned drawings

