

# FISHER & PAYKEL

## PRELIMINARY SPECIFICATION GUIDE

## FRONT LOADER WASHING MACHINE, 12KG SERIES 9



### OVERVIEW

Designed to handle large loads, this 12kg front loader has advanced wash functions including intuitive ActiveIntelligence™ technology. The new Steam Refresh cycle is perfect for quickly reducing odours and de-wrinkling clothes, while a B Energy Rating ensures less resources are used. Works with Google Assistant and Amazon Alexa, and can be paired with a matching dryer for a clean, considered laundry.

### MODELS

Front Loader Washing Machine, 12kg  
WH1260F2

### SERIES

Series 9  
Front Loader

### FEATURES

- ① Designed to match our dryers with outstanding aesthetics and complimentary wash cycles
- ② Optimal clean with ActiveIntelligence™ Technology
- ③ Better fabric care with SmartDrive™ Technology
- ④ Fast and even mixing of detergent with Vortex Wash
- ⑤ Steam Refresh cycle de-wrinkles, deodorises, and refreshes clothes
- ⑥ Add or remove items during the wash cycle with Add a Garment
- ⑦ Wool cycle with a Woolmark™ guarantee
- ⑧ Works with Google Assistant and Amazon Alexa
- ⑨ Option to download cycles via easy-to-use app
- ⑩ Intuitive LCD display


# FISHER & PAYKEL

## PRELIMINARY SPECIFICATION GUIDE


## FRONT LOADER WASHING MACHINE, 12KG SERIES 9

### SPECIFICATIONS


|                   |  |
|-------------------|--|
| <b>Model No.</b>  | WH1260F2   |
| <b>Dimensions</b> | H 850mm W 600mm D 675mm                                      |
| <b>Weight</b>     | 82kg   |
| <b>Electrical</b> |  |
| <b>Supply</b>     | 220V - 240V, 50Hz  |
| <b>Service</b>    | 10-amp circuit   |
| <b>Outlet</b>     | 3-prong grounding-type                                       |
| <b>Plumbing</b>   |  |
| <b>Supply</b>     | Hose set provided  |
| <b>Pressure</b>   | Max. 1MPa (150psi) Min. 30KPa (4.5psi),<br>Min. 6 litres/min |

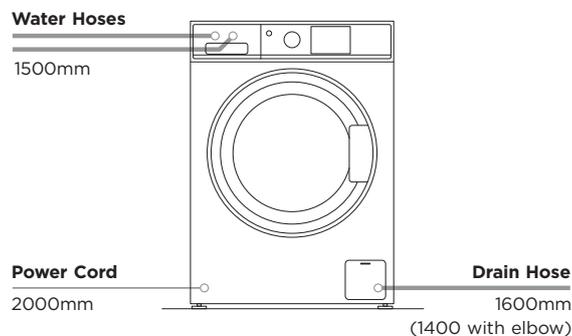

### PRODUCT DIMENSIONS

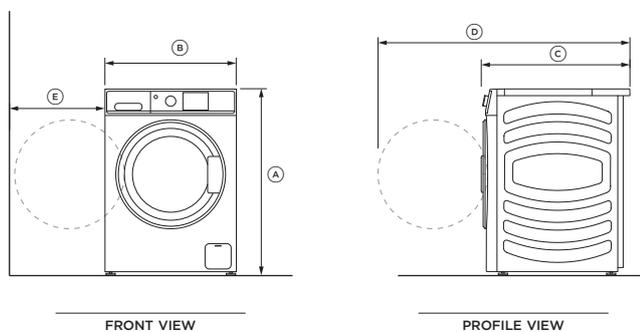

### CAVITY DIMENSIONS: STANDARD INSTALLATION

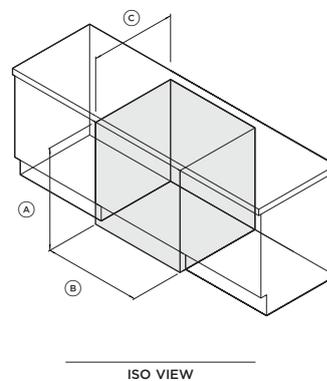

|   | mm   |
|---|------|
| <b>(A) Overall height*</b>                  |      |
| • Min                                       | 845  |
| • Max                                       | 860  |
| <b>(B) Overall width</b>                    | 600  |
| <b>(C) Overall depth**</b>                  | 675  |
| <b>(D) Depth with the door open</b>         | 1080 |
| <b>(E) Min. door clearance to adj. wall</b> | 355  |

\* Includes adjustable mounted feet and the range of movement

\*\* Includes dial and door when closed

|   | mm  |
|---|-----|
| <b>(A) Minimum height*</b>                                      | 865 |
| <b>(B) Minimum width</b>  | 640 |
| <b>(C) Minimum overall cavity depth</b>                         |     |
| • Flush with front panel of the product                         | 655 |
| • In cupboard   | 715 |
| <b>Minimum gap clearance to adjacent product or cabinetry**</b> | 20  |

\* Depends on feet adjustment

\*\* Applies to sides, top and rear